


SECTION
N.T.S.

NOTE: ALL MEASUREMENTS IN MM.

NOTE:


1. 6mm WIDE SEALANT RESERVOIR IS DESIGNED TO SUIT A PERFORMED NEOPRENE COMPRESSION SEAL AS FOLLOWS:
 - 11mm UNCOMPRESSED WIDTH
 - SET 3-6mm BELOW SURFACE
 - CHECK MANUFACTURERS SPECIFICATION
2. SURFACE TEXTURE BY TRANSVERSE BROOMING
3. CURING IMMEDIATELY AFTER FINISHING OPERATIONS ARE COMPLETE - REFER TO SECTION 9 OF C&CA TECHNICAL NOTES SEPT. 1982 (OUTLINE GUIDE FOR CONSTRUCTION OF CONCRETE ROAD PAVEMENTS).
4. LONGITUDINAL EDGE TO BE ROUNDED TO 6mm ϕ .

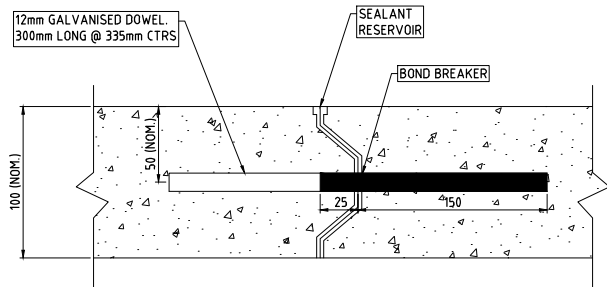

DOWELLED CONSTRUCTION
(CONNOLLY) JOINT - UNREINFORCED

N.T.S.

NOTE: ALL MEASUREMENTS IN MM.

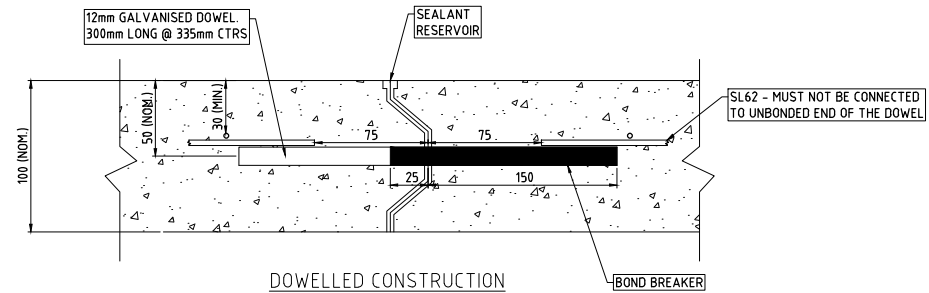

DOWELLED CONSTRUCTION
(CONNOLLY) JOINT - REINFORCED

N.T.S.

NOTE: ALL MEASUREMENTS IN MM.

DATE	DESCRIPTION	REV	OFFICER
10.05.2017	UPDATED DRAFTING STANDARDS	B	A. SALAMON
05.03.2013	STANDARD CYCLEWAY	A	-



DRAWING TITLE:

STANDARD CYCLEWAY

Revision:	B
Plan No.	S152
Date:	10.05.2017
Sheet Size	A4